


1.54 Inch LCD Tft LCD 240*240 Brightness 700cd/M² LCD Accessories Wear Display

Our Product Introduction

for more products please visit us on displaytftlcd.com

Basic Information

- Place of Origin: Shenzhen, China
- Brand Name: RGH
- Certification: ISO9001/ISO14001
- Model Number: RT154047B
- Minimum Order Quantity: 3PCS
- Price: Negotiable
- Packaging Details: Standard Exportation Package
- Delivery Time: 3-5 weeks
- Payment Terms: L/C, T/T, Paypal
- Supply Ability: 3.5kk


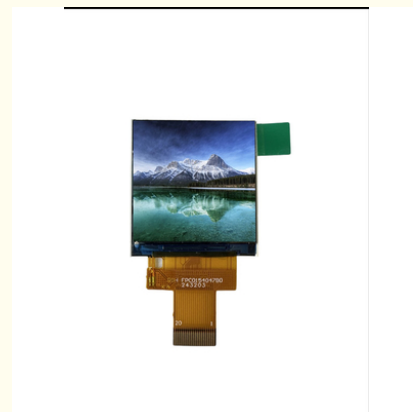


Product Specification

- Size: 1.54 Inch
- Resolution: 240*240
- Viewing Direction: ALL O'clock
- LCD Type: Transmissive TFT
- LCM Outline Dimension: 31.52 (H) X33.72(V) X1.95(T) Mm
- Viewing Area: 28.72(H) X28.72 (V)
- Active Area: 27.72(H) X27.72 (V)
- Operating Temperature: -10 ~60
- Storage Temperature: -20 ~70
- Brightness: 700cd/m²
- Driving IC: ST7789T9-G4-1
- Response Time: 30ms
- Contrast Ratio: 900:1



More Images






HIGH TEMPERATURE
AND HUMIDITY



ELECTROSTATICS
ESD



CORROSION-RESISTANT



ANTI-VIBRATION




SALT SPRAY TEST



AGING AT HIGH
TEMPERATURES

GOOD DRIVER COMPATIBILITY VARIOUS INTERFACES ARE SUPPORTED

||

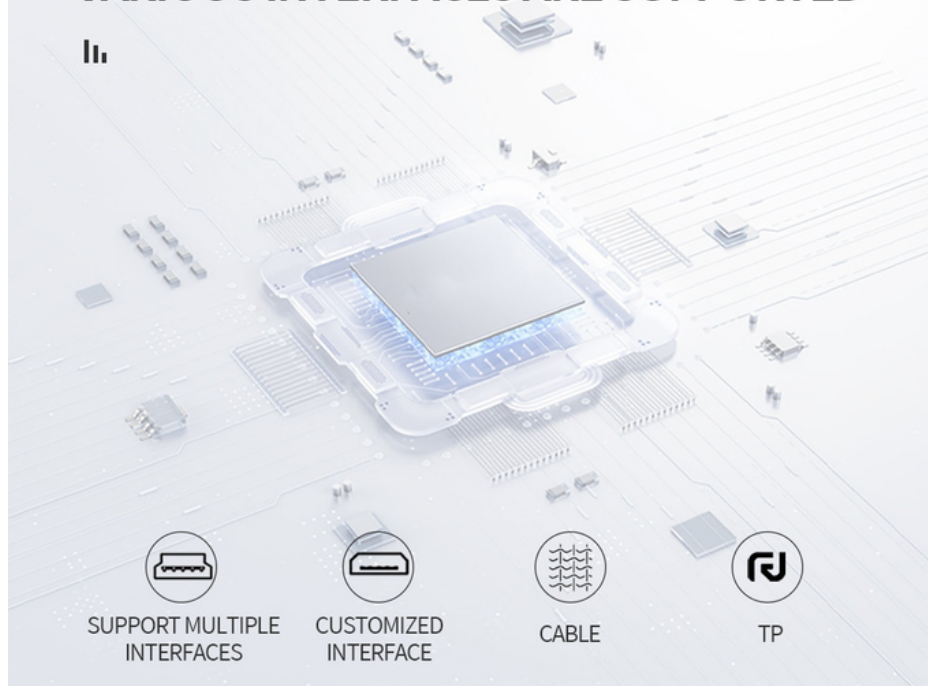

SUPPORT MULTIPLE
INTERFACES



CUSTOMIZED
INTERFACE



CABLE




TP


IT IS USED IN A VARIETY OF FIELDS

DIVERSE NEEDS · MULTIPLE FIELDS · I AM ENOUGH

THIS PRODUCT CAN BE WIDELY USED IN INDUSTRY,
AUTOMOTIVE ELECTRONICS, HOME APPLIANCES,
MEDICAL EQUIPMENT, COMMUNICATIONS AND MANY OTHER FIELDS

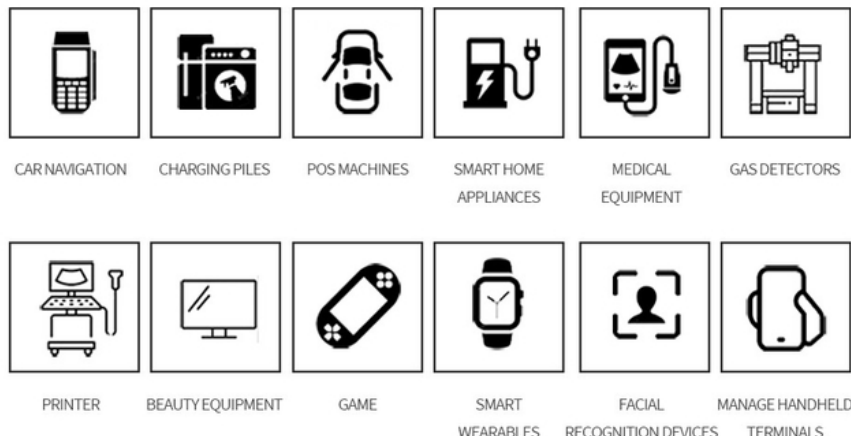

NO.	Symbol	Level	Function
1	NC		NC
2	LEDK		LED power cathode
3	NC		NC
4	NC		NC
5	LEDA		LED power anode
6	GND		Ground
7	FAMARK		Tearing effect signal is used to synchronize MCU to frame memory
8	SDA		SPI interface input/output pin.
9	WR		command selection pin in 4-line serial interface
10	RS		This pin is used to be serial interface clock
11	CS		Chip selection pin
12	RESET		This signal will reset the device and it must be applied to properly
13	IOVCC	1.8V	Power setting
14	VCC	2.8V	Power setting
15	GND		Ground

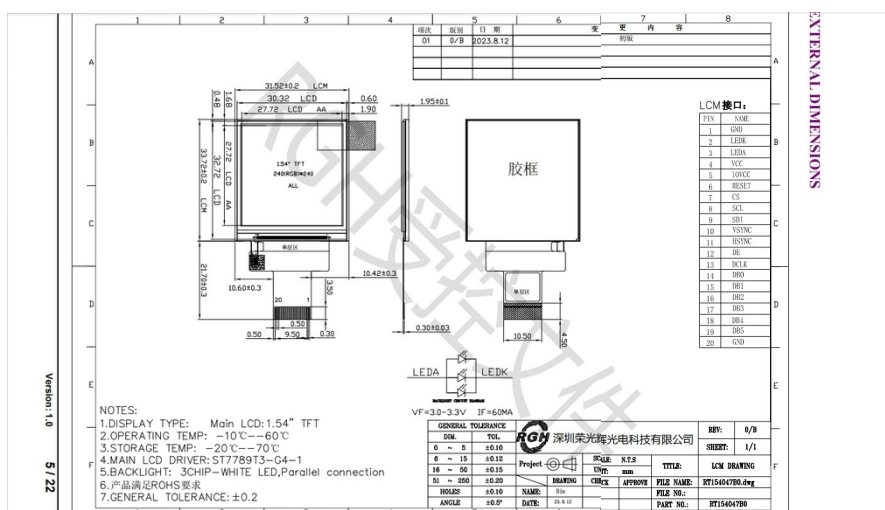


RONGHUI OPTOELECTRONICS

INGENUITY SPIRIT: WORK HARD



FOCUS SO WE ARE MORE PROFESSIONAL

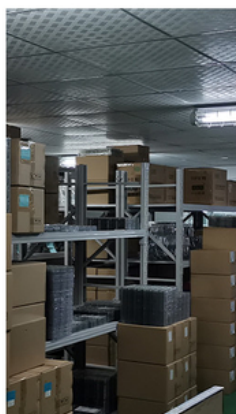

FACTORY DIRECT SUPPLY

THE PRINCIPLE OF
SIMPLICITY AND PRACTICALITY

INGENUITY

TREAT IT WITH CARE
PER PRODUCT



PERFECT SERVICE

PROVIDE PROFESSIONAL
SERVICES TO CUSTOMERS


CERTIFICATE DISPLAY




PACKING METHOD




- (1). Put module into tray cavity :
- (2). Tray stacking
- (3). Put 1 cardboard under the tray stack and 1 cardboard above:
- (4). Fix the cardboard to the tray stack with adhesive tape:
- (5). Put the tray stack and 4 pcs desiccant into the LDPE bag
- (6). Fix the LDPE bag with adhesive tape:
- (7). Put LDPE bag with tray stack into carton.:
- (8). Carton sealing with adhesive tape.

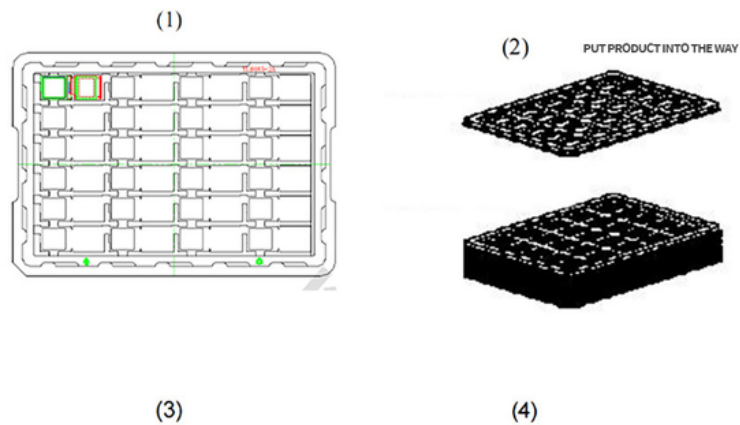





(5)





(6)



(7)



(8)



FAQ

1: What are the payment terms?

A: We usually accept T/T, Paypal, other terms to be negotiated.

2: What's the lead time?

A: Usually 3~5 days for sample orders if goods are in stock, and 3~5 weeks for mass production (basing on the quantity and product).

3. Do you support custom logo on the CTP?

A: Yes, we support, pls send us your detail inquiry, our sales will contact you asap.

4. How can I place a sample order?

A: Pls send us your inquiry, our sales will contact you soon.

5. What size LCD display can you provide?

A: 0.96 inch to 20 inch TFT LCD display we can provide.

7. What's your MOQ?

A: Most of our product's MOQ is 1K, beacuse we are a LCD display manufacturer.

8. What shipping ways do you support?

A: We can consult with it.



Rongguang Hui Optoelectronics Science and Technology



+8613924639701



allan@rgh-display.com



displaytftlcd.com

Meilan Business Center 2001, at the intersection of Xixiang Avenue and Qianjin 2nd Road , Xixiang Street ,

